


PISA


Max. working pressure 10 bar
 Max. working temperature 95°C
 All dimensions are in mm.
 Connections 1/2"
 Optional middle connection available
 Optional heating element usage available

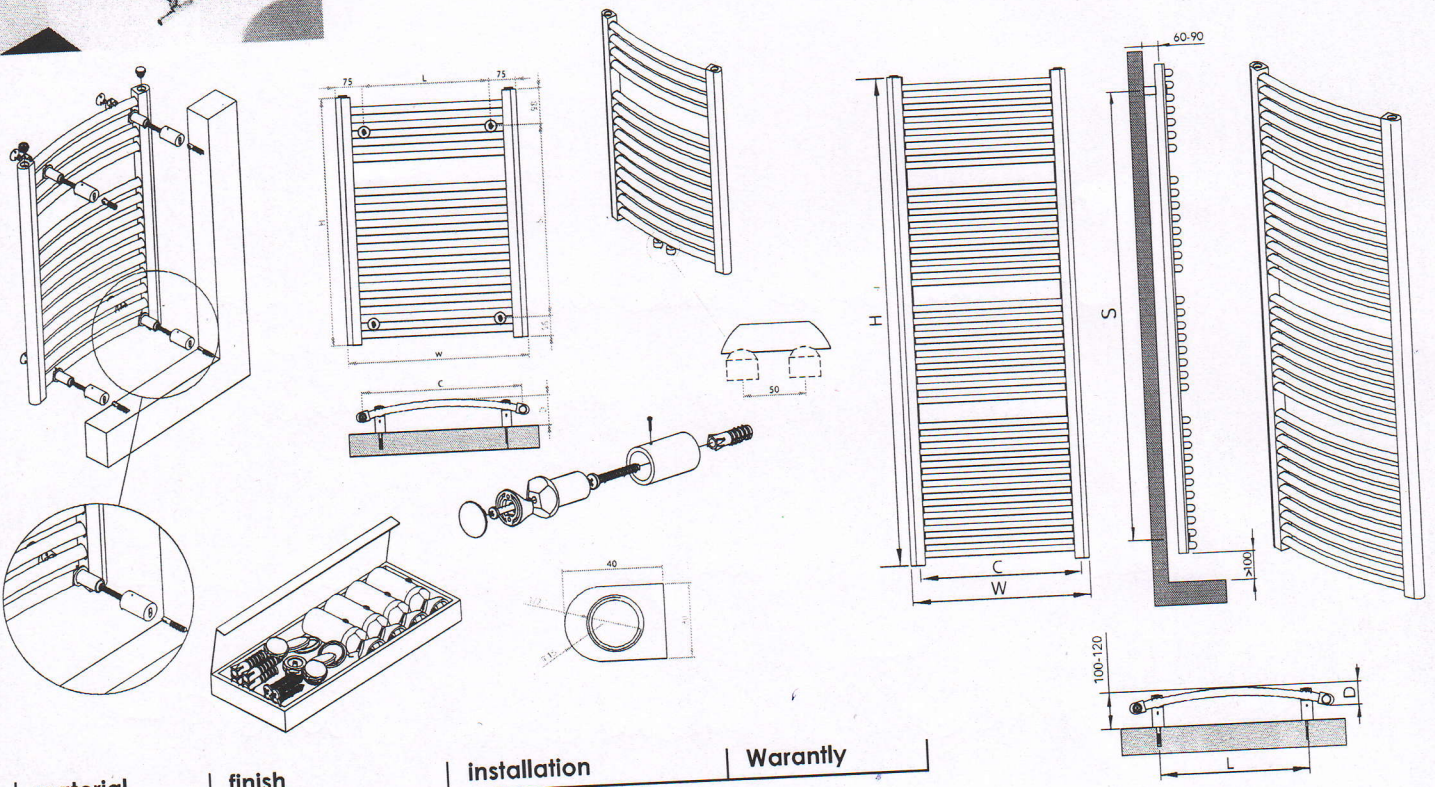

material	finish	installation	Waranty
steel	RAL painted chrome plated	vertical	5 years

Product Code	Width W	Height H	Depth D	Connection Centers C	Tube Quantity	Assembly Axis		Weight Kg.	Water Capacity lt.	Thermal Power (painted)			Thermal Power (chrome)		
						S	L			btu	k/cal	watt	btu	k/cal	watt
PISO450068814	450	688	60	410	14	500	290	4,7	2,9	977	246	286	753	190	221
PISO500068814	500	688	65	460	14	500	340	5,1	3,1	1066	269	312	822	207	241
PISO600068814	600	688	70	560	14	500	440	5,8	3,6	1245	313	365	960	242	281
PISO750068814	750	688	80	710	14	500	590	6,9	4,3	1513	381	443	1166	294	341
PISO450111822	450	1118	60	410	22	930	290	7,5	4,7	1552	391	455	1197	301	350
PISO500111822	500	1118	65	460	22	930	340	8,1	5,0	1693	426	496	1305	329	382
PISO600111822	600	1118	70	560	22	930	440	9,2	5,7	1973	697	578	1521	383	445
PISO750111822	750	1118	80	710	22	930	590	10,9	6,8	2394	603	701	1845	365	540
PISO450172034	450	1720	60	410	34	1535	290	11,6	7,2	2396	603	701	1846	465	541
PISO500172034	500	1720	65	460	34	1535	340	12,5	7,7	2612	658	765	2014	507	590
PISO600172034	600	1720	70	560	34	1535	440	14,2	8,8	3046	767	892	2348	591	688
PISO750172034	750	1720	80	710	34	1535	590	16,8	10,5	3696	931	1082	2849	718	834

Orton		350/95	500/95	600/95
A Column height	mm	430	580	680
B Coupling size	mm	350	500	600
C Column width	mm	80	80	80
D Mounting depth	mm	95	95	95
Column weigh	kg	1,07	1,42	1,61
Column water content	l	0,30	0,34	0,38
Heating area	m ² /čl.	0,36	0,51	0,61
Heating effect 90/70/20°C ΔT 60	W/čl.	113	162	185
Heating effect 70/62/20°C ΔT 50	W/čl.	89	128	145
Heating effect 55/45/20°C ΔT 30	W/čl.	45	65	73
Heating effect exponent	n	1,30	1,32	1,33

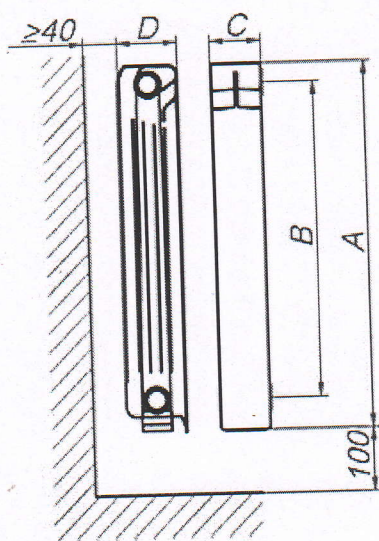

Ugradnja na otvoreni ravni zid